


## Technical Data Sheet

### INNOFACE

#### ■ PRODUCT INFORMATION

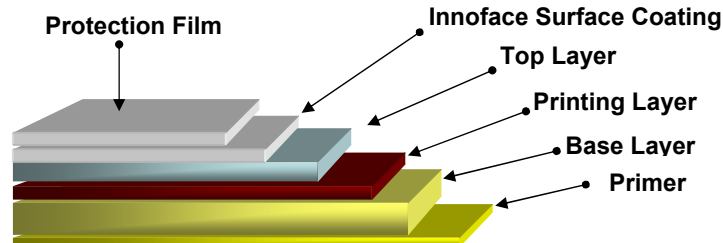

#### ■ CHARACTERISTIC

Super matt & Soft-touch. Excellent Anti-scratch and Chemical resistance, Good forming

#### ■ TECHNICAL DATA

Properties	Test Method (Standard)	Unit	Specification	Tolarances
Thickness		mm	Solid - 0.4 Wood - 0.4	+0.03, -0.02
Width		mm	1,400	
Tensile Strength	DIN EN ISO 527- 3	kg/cm <sup>2</sup>	L : ≥ 440 W : ≥ 440	
Elongation with Heat	LG Test Method (90 °C/3min)	%	≥ 250	
Dimensional stability	LG Test Method (80 °C/10min)	%	Longitudinal: max. ±2.5 Tranaverse: max. ±1.0	
Gloss	60° adapter	Glosspoints	≤3 (on light prints) ≤2 (on dark prints)	
Resistance to scratches	Pencil Test	200g	2H	
Taber Abrasion Resistance	JIS K 6902. Weight Loss from CS-10 wheel at 1,000g	500 cycle Loss %	≤0.50%	
Stain resistance	DIN68861-1		1C	
Colour			Manufacture and visual assessment	
Delamination	Customer Test Method		Basic Drawing to increase adhesive strength Customer's operation condition is a factor for adhesive - relationship between surface ornge peel and adhesive strength	

These are only Lab. test data above described, so thus you can not use this specification sheet for the purpose of legal intension.

LG Hausys Ltd.

High Performance Materials Division

LG Twin Tower, 20 Yeouido-dong, Yeoungdeungpo-gu, Seoul 150-721, Korea

# deco foil

