


## Technical Data Sheet

### PET Forming Sheet

#### PRODUCT INFORMATION

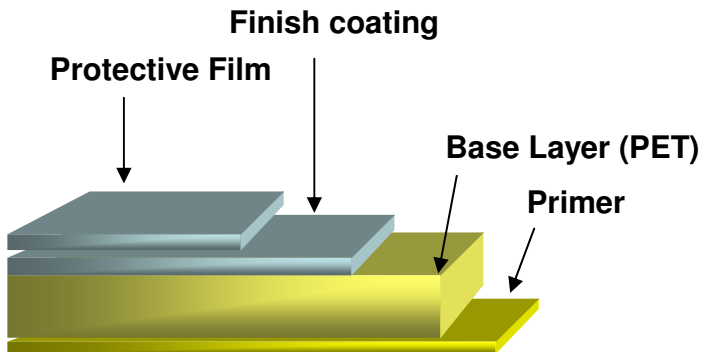

#### TECHNICAL DATA

Properties	Test Method (Standard)	Unit	Specification	Tolarances
Thickness		mm	Solid : 0.5mm	+0.05, -0.05
Width		mm	1,440	
Tensile Strength	DIN EN ISO 527- 3	kg/cm <sup>2</sup>	L : 550 W : 500	L : ≥ 550 W : ≥ 500
Tear strength	DIN EN ISO 527- 3	kg/cm	L : 150 W : 120	L : ≥ 150 W : ≥ 120
Colour consistency	DIN6174	ΔE	≤ 0.5	
Dimensional stability	LG Test Method (80℃/10min)	%	Longitudinal: max. ±2.5 Tranaverse: max. ±1.0	
Gloss	60° adapter	Gloss points	88	± 2
Delamination	Customer Test Method	Basic Drawing to increase adhesive strength Customer's operation condition is a factor for adhesive - relationship between surface ornge peel and adhesive strength		

These are only Lab. test data above described, so thus you can not use this specification sheet for the purpose of legal intension.

LG HAUSYS Ltd.

LIVING SOLUTION TECHNICAL TEAM ULSAN PLANT

388. Mangyang-ri Onyang-myun, Ulju-gu Ulsan City 689-900 KOREA

Telephone No. 82-52-231-4222

Fax No. 82-52-231-4383

**deco foil**